



# 30.600 G

## OEM Pressure Transmitter Low Cost

### Applications:

- ▶ mechanical and plant engineering
- ▶ general industrial applications

### Characteristics:

- ▶ ceramic sensor
- ▶ accuracy 1 % FSO according to IEC 60770
- ▶ nominal pressure ranges from 0 ... 1.6 bar up to 0 ... 250 bar

### Technical Data




Input pressure range													
Nominal pressure gauge	[bar]	1.6	2.5	4	6	10	16	25	40	60	100	160	250
Overpressure	[bar]	5	5	12	12	20	50	50	120	120	200	400	400
Burst pressure $\geq$	[bar]	7	7	15	15	25	70	70	150	150	250	500	500
Vacuum resistance		unlimited											
Output signal / Supply													
Standard	2-wire:	4 ... 20 mA		/		$V_S = 8 ... 32 V_{DC}$							
Options	3-wire:	0 ... 10 V		/		$V_S = 14 ... 30 V_{DC}$							
	3-wire ratiometric:	$V_{Sig} = 0.5 ... 4.5 V$		/		$V_S = 5 \pm 0.5 V_{DC}$							
Performance													
Accuracy <sup>1</sup>		$\leq \pm 1 \% \text{ FSO}$											
Permissible load	2-wire:	$R_{max} = [(V_S - V_{Smin}) / 0.02] \square$											
	3-wire:	$R_{min} = 10 \text{ k}\Omega$											
Influence effects	supply:	0.05 % FSO / 10 V											
	load:	0.05 % FSO / k $\Omega$											
Response time	2-wire:	$\leq 10 \text{ msec}$											
	3-wire:	$\leq 3 \text{ msec}$											
Measuring rate		1 kHz											
<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)													
Thermal effects (Offset and Span) / Permissible temperatures													
Thermal error		$\leq \pm 0.5 \% \text{ FSO} / 10 \text{ K (typ.)}$		in compensated range		-25 ... 85 °C							
Permissible temperatures		medium: -25 ... 125 °C		electronics / environment:		-25 ... 85 °C		storage: -40 ... 85 °C					
Electrical protection													
Short-circuit protection		permanent		3-wire ratiometric:		none							
Reverse polarity protection		no damage, but also no function											
Electromagnetic protection		emission and immunity according to EN 61326											
Mechanical stability													
Vibration		10 g, 25 Hz ... 2 kHz		according to DIN EN 60068-2-6									
Shock		500 g / 1 msec		according to DIN EN 60068-2-27									

Materials	
Pressure port / housing	stainless steel 1.4301
Seals (media wetted)	FKM others on request
Diaphragm	ceramics Al <sub>2</sub> O <sub>3</sub> 96 %
Media wetted parts	pressure port, seals, diaphragm
Miscellaneous	
Weight	approx. 120 g
Current consumption	2-wire: max. 25 mA      3-wire ratiometric: typ. 1.5 mA 3-wire voltage: typ. 5 mA (short circuit current: max. 20 mA)
Long term stability	± 0.3 % FSO / year at reference conditions
Operational life	> 100 x 10 <sup>6</sup> cycles
CE-conformity	EMC Directive: 2004/108/EC      Pressure Equipment Directive: 97/23/EC (module A) <sup>2</sup>


<sup>2</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar

### Wiring diagrams

#### 2-wire-system (current)

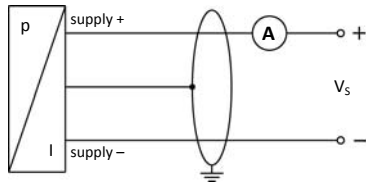


#### 3-wire-system (voltage)

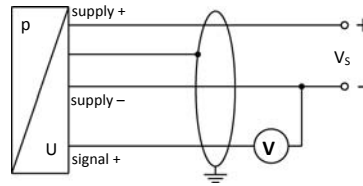


### Pin configuration

Electrical connection	ISO 4400	Micro (contact distance 9.4 mm)	M12x1 (4-pin), plastic	cable colours (DIN 47100)
Supply +	1	1	1	wh (white)
Supply -	2	2	2	bn (brown)
Signal + (for 3-wire)	3	3	3	gn (green)
Shield	ground pin	ground pin	4	gn/ye (green / yellow)


### Electrical connections (dimensions in mm)

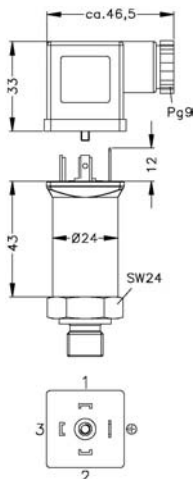


ISO 4400 (IP 65)

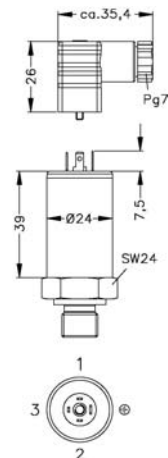

Micro, contact-distance 9.4 mm (IP 65)

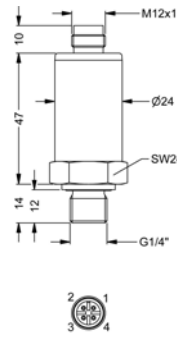

M12x1, 4-pin (IP 67)

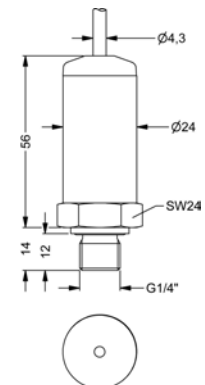


cable outlet with PVC-cable (IP 67)<sup>3,4</sup>


<sup>3</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

<sup>4</sup> different cable types and lengths available, permissible temperature depends on kind of cable

### Mechanical connection (dimensions in mm)



G1/4" DIN 3852



1/4" NPT

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

